



Basic Specifications		
Product Name		Lithium Manganese Dioxide(Li-MnO ₂) Battery
Model		CR9V 600mAh
Nominal voltage		6.0V
Capacity	Nominal	600 mAh
	Minimum	550 mAh
Discharge Cut-off Voltage		5.4 V
Max constant discharge current		160mA
Max. pulse current		200mA
Operating Temperature		-40~ +60°C
Storage Temperature		-10~ +40°C
Relative humidity		65±20%
Period of Validity		5 year
Dimensions	Length	26.5 mm
	Width	17.5 mm
	Height	48.5 mm
Weight(Approximately)		29g

Dimensions :

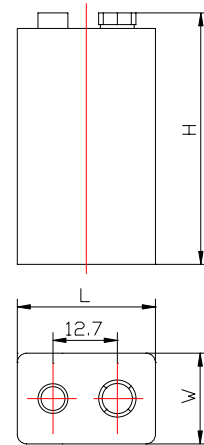


(Unit: mm)

Load Characteristics

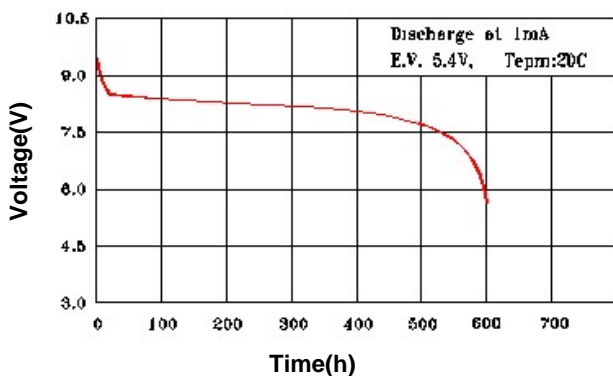

Load Characteristics

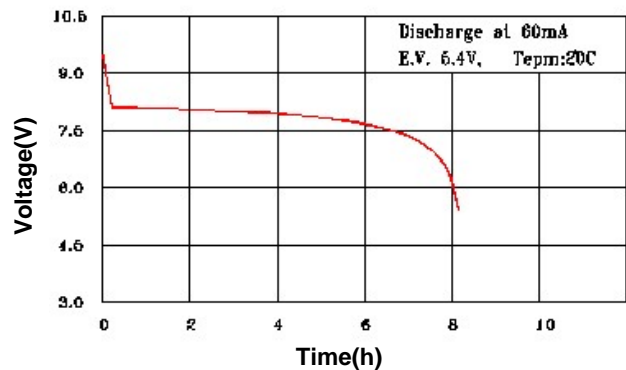

WARNING:

- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not place the battery in heater, washer or high-pressure container.
- Stop using when the battery become heat, emit smell or appear other abnormality during use or storing.

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice