



Basic Specifications		
Product Name		Lithium Manganese Dioxide(Li-MnO ₂) Battery
Model		CR1/3N
Nominal voltage		3.0V
Capacity	Nominal	160 mAh
	Minimum	140 mAh
Discharge Cut-off Voltage		2.0V
Max constant discharge current		50mA
Max. pulse current		80mA
Operating Temperature		-40~ +60°C
Storage Temperature		-10~ +40°C
Relative humidity		65±20%
Period of Validity		5 year
Dimensions	Diameter	11.5 mm
	Height	20.5 mm
Weight(Approximately)		3.8g


Discharge performance @ 25°C

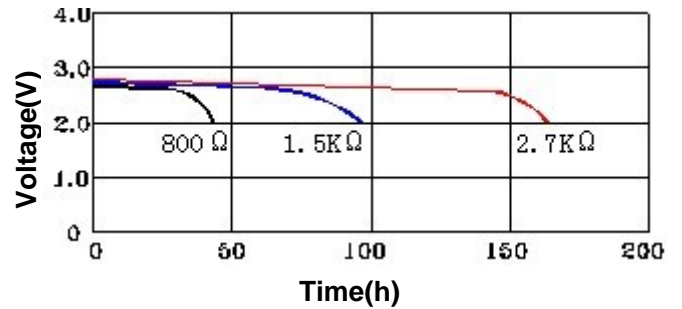

Discharge Characteristics @1mA

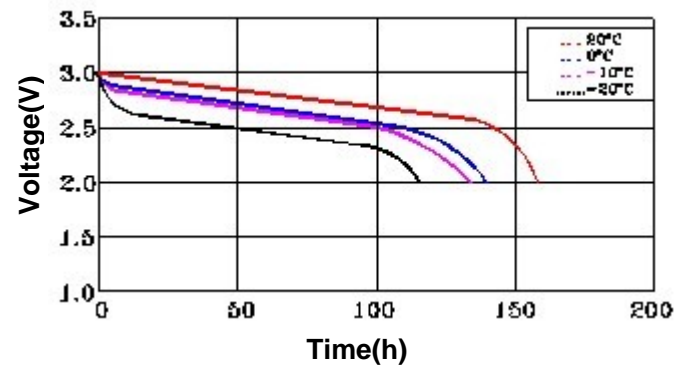


Dimensions :

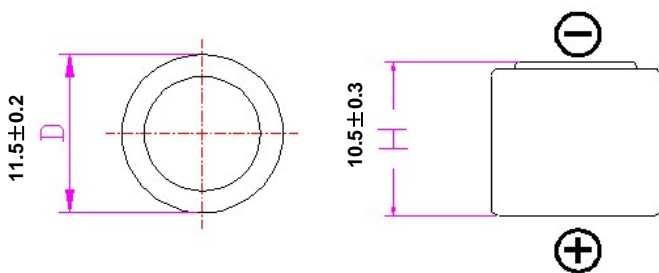

Unit: mm

Continuous Discharge Characteristics

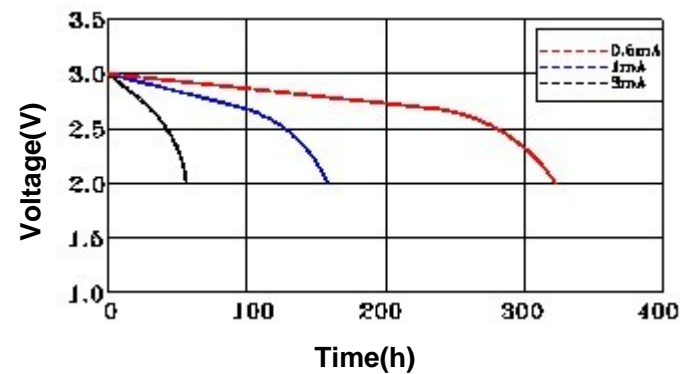

WARNING:

- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not place the battery in heater, washer or high-pressure container.
- Stop using when the battery become heat, emit smell or appear other abnormality during use or storing.

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice