

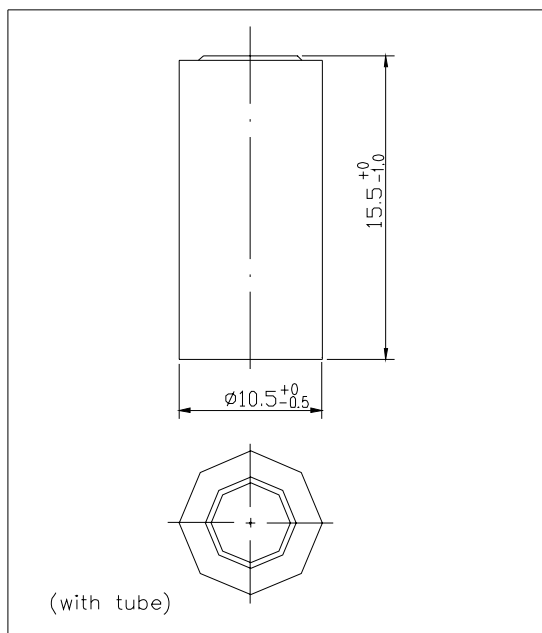
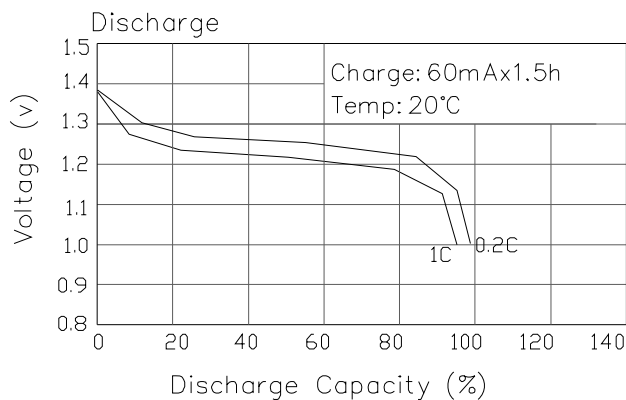


| Single Specification | | |
|-------------------------------|-----------------|--|
| Product Name | | Sealed Nickel Cadmium Cylindrical Rechargeable Battery |
| Model | | EJD-1/3AAA60 |
| Nominal Voltage | | 1.2V |
| Nominal Capacity | | 60mAh |
| Dimension (with tube) | Diameter | 10.5 ⁺⁰ / _{-0.5} |
| | Height | 14.5 ⁺⁰ / _{-1.0} |
| Internal Resistance at 1000Hz | | ≤80m Ω (After charge) |
| Charge | Standard | 6mA×16h |
| | Rapid | 60mA×90min |
| | Trickle | 1.8~3.0mA |
| Discharge Cut-off Voltage | | 1.0V |
| Cycle Life | | ≥ 500 Cycles |
| Ambient Temperature | Standard Charge | 0°C to 45°C |
| | Rapid Charge | 10°C to 40°C |
| | Trickle Charge | 0°C to 45°C |
| | Discharge | -20°C to 50°C |
| | Storage | -20°C to 45°C |
| Ambient Humidity | | 65±20% |

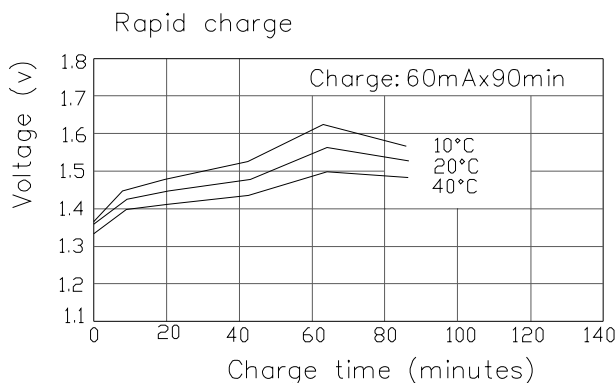

General Characteristics

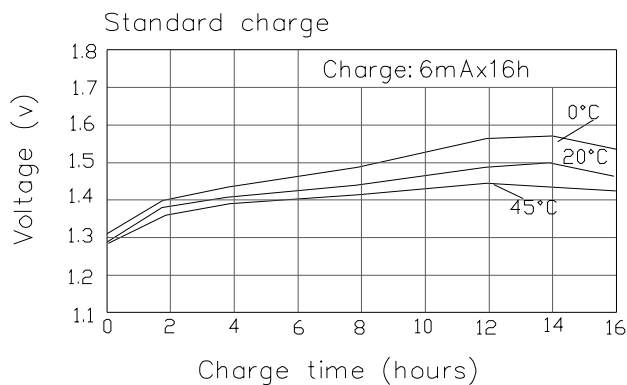

Manufacturer reserves the right to alter or amend the approval sheet without the prior notice